


## ASSEMBLY INSTALLATION

Disconnect power at main fuse box before installing fixture to prevent possible injury from electrical shock. Remove all parts and parts packages from carton.

**Warning: Fixtures weighing more than 50 lbs. or more must be Mounted directly to the building structure.**

**Avertissement: Les accessoires qui pèsent plus que 25 kilogrammes ou doit être plus monté directement à la structure de bâtiment.**

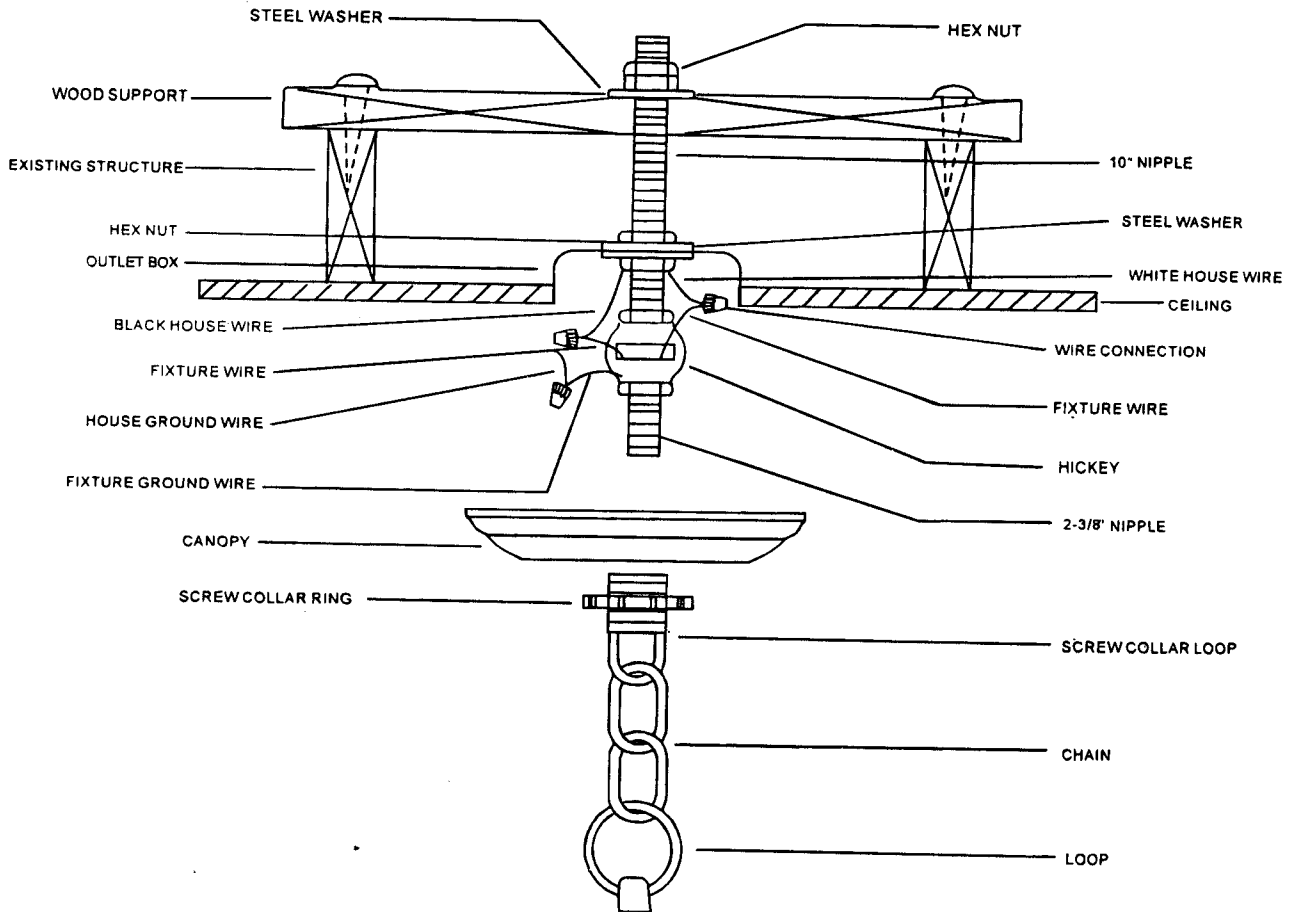

- (1) Remove center knockout in outlet box.
- (2) Position wood support across ceiling joists over outlet box. Locate and drill hole for the 3/8" nipple.
- (3) After drilling hole, align wood support over the outlet box and secure with nails.
- (4) Install 10" long nipple through wood support and center hole in outlet box with hex nuts and washers as shown. Rod should extend through outlet box a minimum of 1 1/2". Tighten the two hex nuts above the wood support against each other to lock their position on the nipple.  
Caution: Do not tighten hex nuts at outlet box at this time. Leave loose until entire fixture weight is suspended.
- (5) Attach hex nut, hickey, and 2 3/8" nipple onto the end of support rod
- (6) Connect screw collar loop onto the threaded nipple. Pass canopy over screw collar loop for visual inspection - Approximately one-half of the screw collar loops exterior threads should be exposed. Make necessary adjustments as required and remove canopy.
- (7) Spread a chain link and attach to the fixture loop. Slip threaded ring onto the other end of the chain, then the canopy, then attach chain to screw collar loop.
- (8) Weave electrical wires and ground wire up chain and through the screw collar loop and into the outlet box.

### ELECTRICAL CONNECTIONS

- (1) Cut off excess wire leaving 6" for electrical connections. Split the wire into separate leads.
- (2) Connect grounding wire (green or bare copper) from the supply circuit to the grounding wire on the fixture.
- (3) Connect one half of the fixture cord to the white wire of the supply circuit. Connect the other half of the fixture cord to the black wire of the supply circuit.
- (4) CAUTION-NO loose strands or loose connections should be present, Secure with UL approved wire connectors and electrical tape.