




ASSEMBLY INSTRUCTIONS FOR 29231

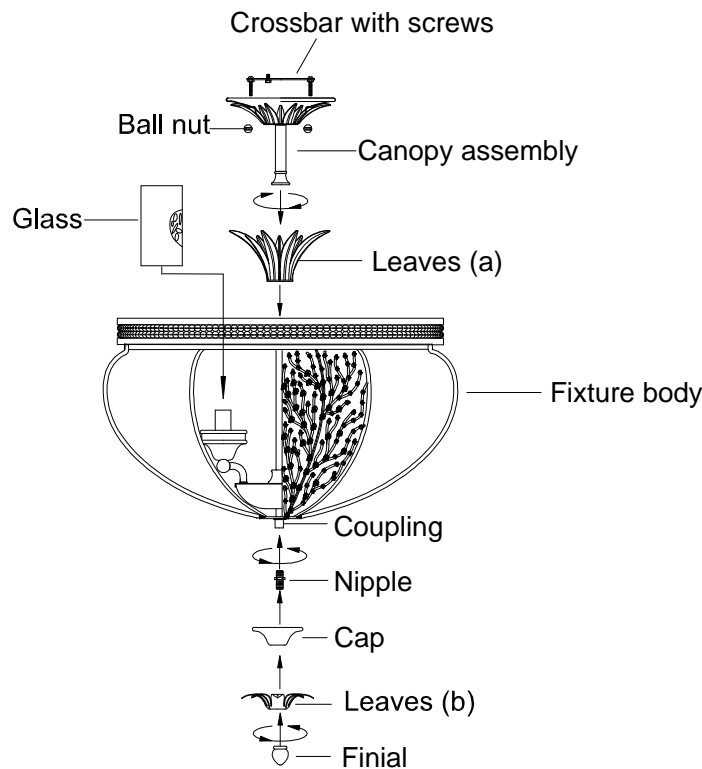

1. With power to the installation point **OFF**, attach the crossbar with (2) mounting screws to ceiling mounted outlet box with (2) outlet box screws.
2. Make wires connections: (We recommend 2 people for this step). Position the fixture pan under the outlet box. Attach house ground wire to fixture ground wire. Proceed to attach both to the crossbar using ground screw. Using wire connectors connect the house white wire to the fixture white wire (or ribbed side); connect the house black (or red) wire to the fixture black wire (or smooth side).
3. Carefully tuck all wires into the ceiling mounted outlet box and position the fixture over the outlet box. Align and pass the (2) mounting screws attached to crossbar through (2) mounting holes in fixture pan. Locate (2) ball nuts and thread it onto ends of mounting screws. Hands tighten until snug to secure fixture to ceiling. Be sure there are no trapped or pinched wires.
4. Place leaves (a) over the protruding nipple at top of fixture body, then thread canopy assembly onto the protruding nipple until snug.
5. Thread nipple into the coupling at bottom of fixture body.
6. Locate cap and leaves (b) carefully, place them over the nipple and secure with finial.
7. Install proper bulbs to each socket referring to the markings and labels on fixture for maximum wattage.
8. Place glass over each socket.
9. Restore power to the installation point **ON**. Retain this sheet for future reference.