




ASSEMBLY INSTRUCTIONS FOR 29236-9&29236-11

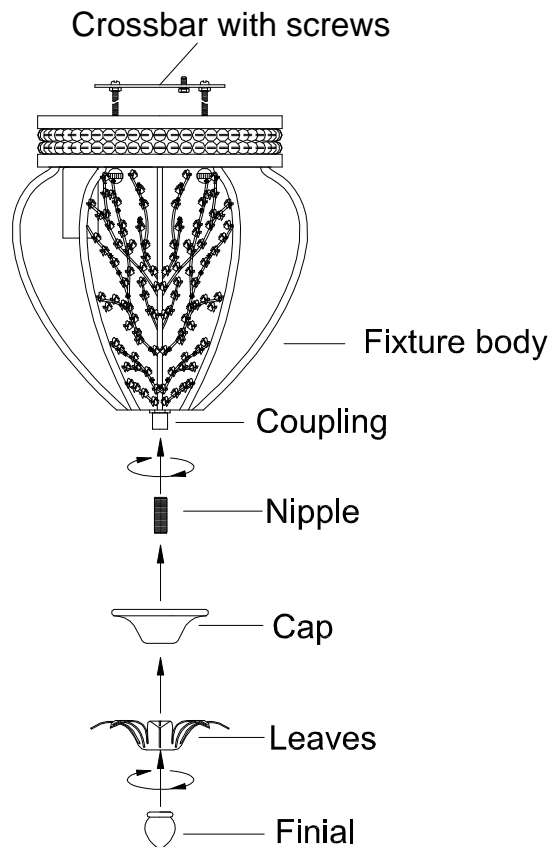

1. With power to the installation point **OFF**. Make sure to remove coupling and cage of fixture body before attaching the crossbar with (2) mounting screws to ceiling mounted outlet box with (2) outlet box screws.
2. Make wires connections: (We recommend 2 people for this step). Position the fixture pan under the outlet box. Attach house ground wire to fixture ground wire. Proceed to attach both to the crossbar using ground screw. Using wire connectors connect the house white wire to the fixture white wire (or ribbed side); connect the house black (or red) wire to the fixture black wire (or smooth side).
3. Carefully tuck all wires into the ceiling mounted outlet box and position the fixture over the outlet box. Align and pass the (2) mounting screws attached to crossbar through (2) mounting holes in fixture pan. Locate (2) ball nuts and thread it onto ends of mounting screws. Hands tighten until snug to secure fixture to ceiling. Be sure there are no trapped or pinched wires.
4. Make sure to remove the coupling and cage of fixture body before installing proper bulbs (not provided) to each socket referring to the markings and labels on fixture for maximum wattage.
5. Install the top end of nipple into the coupling at the bottom of fixture body. Hands tighten until snug.
6. Locate cap and leaves carefully, pass their center holes through the bottom of nipple and secure with finial as shown in the illustration.
7. Restore power to the installation point **ON**. Retain this sheet for future reference.