



ASSEMBLY & INSTALLATION INSTRUCTIONS


CAUTION : READ INSTRUCTIONS CAREFULLY AND TURN ELECTRICITY OFF AT MAIN CIRCUIT BREAKER PANEL BEFORE BEGINNING INSTALLATION

WARNING : IF ANY SPECIAL CONTROL DEVICES ARE USED WITH THIS FIXTURE, FOLLOW THE INSTRUCTIONS CAREFULLY TO ASSURE FULL COMPLIANCE WITH N.E.C. REQUIREMENTS. IF THERE ARE ANY QUESTIONS, CONTACT A QUALIFIED ELECTRICAL CONTRACTOR.

MODEL NO. 29629

1. Thread-on the Hanging Loop & Center Stem to the Fixture and ready for Wiring.
2. Please refer to the Installation and Wiring Instruction provided for wire connection.
3. Place the Glass Shade onto the Fitter until it sits properly.
4. Install Type A Bulb (Not Furnished). **DO NOT EXCEED THE MAX. WATTAGE AS INDICATED.**

CLEANING : Use only soft cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage finish.

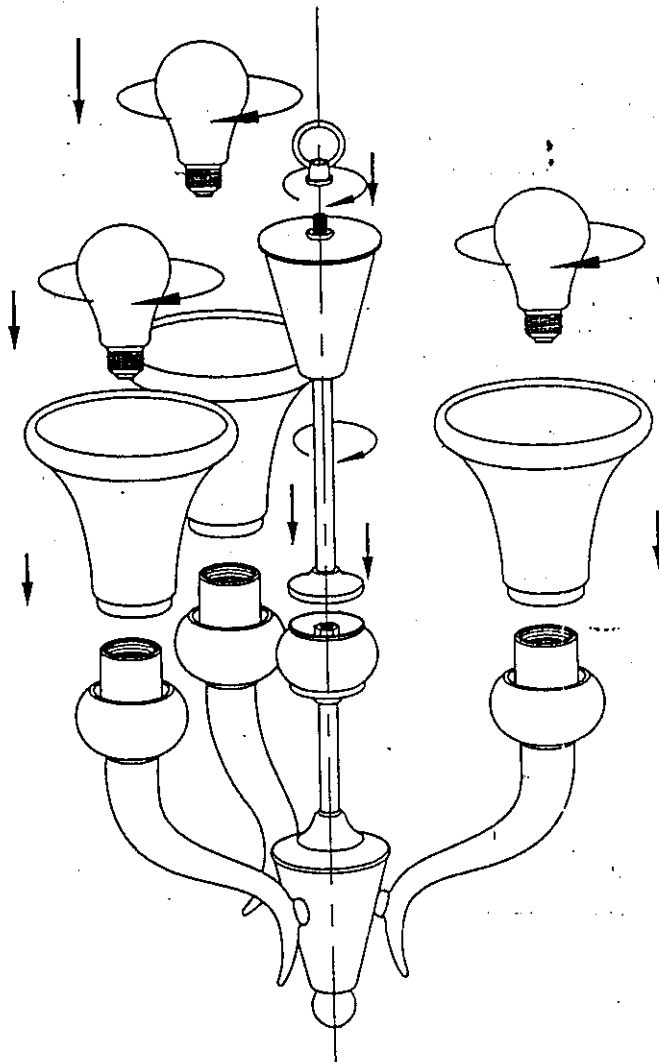



Chain Hung Installation and Wiring Instructions for Fixtures Under 25 lbs.

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!

Installation (see Figure A.)

1. Disconnect power at main electrical panel before installation.
2. Attach mounting strap to outlet box using box screws (not included).
3. Screw threaded nipple into collar loop as far as it will go. Secure with lockwasher and hex nut.
4. Screw threaded nipple into mounting strap approximately 1/2 inch. Adjust height of collar loop by temporarily holding canopy in place against ceiling with collar loop extending downward through hole in canopy. Approximately half of larger exterior threads of collar hole should be protruding below canopy. Secure threaded nipple to mounting strap with hex nut.
5. Use pliers to open one end link of the chain and attach to loop on fixture. Close link. Be careful not to damage the finish on chain. Thread fixture wire through chain links, weaving wire through every second link. See Figure B.
6. Pull ends of chain and wires through collar ring and canopy.
7. Use pliers to open the other end link of chain and attach to collar loop. Close link. Be careful not to damage finish on chain.
8. Pass ends of fixture wires through center hole of collar loop, threaded nipple, and mounting strap.
9. Follow wiring instructions carefully (listed below).

Wiring (see Figure C.)

1. Split the conductors of the fixture wire about 4 inches. Be careful not to expose any of the wire inside of the insulation.
2. Connect the fixture ground wire to the outlet box ground wire using wirenut (not provided). Connect outlet box ground wire to mounting strap with GREEN hex-head ground screw to tapped hole in mounting strap marked "GND".
3. Connect the half of the fixture wire that is white, marked, or has a ribbed surface to the outlet box supply wire (WHITE). Connect the other half of the fixture wire that is black, unmarked, or has a smooth surface to the outlet box supply wire (BLACK or RED). Use wirenuts (not provided) to connect all fixture wires.
4. Spread the electrical splices so that the black wires are on one side of the outlet box and the white wires are on the other side.
5. Slide canopy up into place against ceiling. Slide collar ring up and thread onto collar loop to secure canopy in place.

NOTE: Make sure chain supports the weight of the light fixture and no weight is on either supply or ground wires.

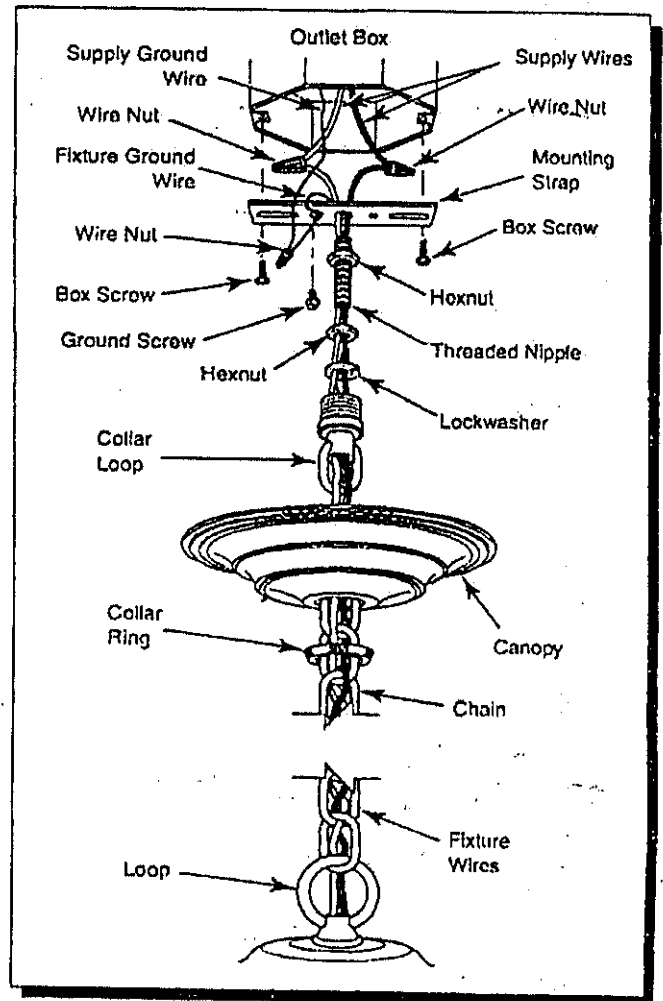


Figure A.

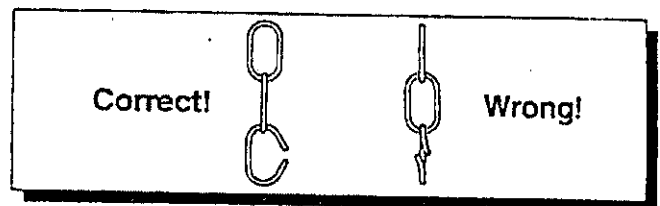


Figure B.

Grounding Detail

Connect Black or Red House Wire to:	Connect White House Wire to:
Black	White
Parallel cord-SPT I & II (round & smooth)	Parallel cord-SPT I & II (square & ridged)
Clear, Brown, Gold or Black (without tracer)	Clear, Brown, Gold or Black (with tracer)
Insulated Wire (Other than GREEN) with copper conductor	Insulated Wire (Other than GREEN) with silver conductor

White, Marked, or Ridged Fixture Wire

White Supply Wire

Black, Unmarked, or Smooth Fixture Wire

Black or Red Supply Wire

Figure C.