

# Lighting Fixture

## Installation Instruction

### Warning:

Before installing fixture, be sure the electricity to the wires you are working with is shut off either by removing the fuse or by setting the circuit breaker off.

### General Information

You don't need special tools to install this fixture. Be sure to follow the steps in the order given.

Under no circumstances should the fixture be hung on house electrical wires. The fixture must be installed by means of support that is installed on a ceiling which contains a radiant type heating system.

Remember that a fuse or circuit breaker protects wires from becoming overheated.

Overheated wires created an overload and cause the fuse to blow or the circuit breaker to trip. The cause of the overload is because too many appliances are on the same line or a short circuit.

Before tracing the wires for a short circuit, be sure to shut off the electricity at the main switch.

If you must replace a blown fuse be sure to replace it with one rated for the ampere capacity of the circuit. For example, if a 15-AMP fuse blows, do not replace it with a 30-AMP fuse.

Use only one hand to screw out a fuse, and keep your other hand away from the wall or any other object, while you are touching the fuse.

### Assemble the fixture


Carefully remove the fixture from the carton and check that all parts are included, as shown in figure. Be careful not to misplace any of the screws or wire connectors which are needed for installing the fixture.

1. Attach the mounting strip to the outlet box using the two mounting screws provided with the outlet box.
2. Connect ground wire from outlet box to cross bar with green ground screw. Connect white supply wire to white fixture wire. Connect black supply wire to black fixture wire with wire nuts.
3. Put the body over the mounting strip and rotate the two screws facing out through the holes of wall mount.
4. Secure the two nuts.
5. Put decorative cap, glass and candle cover over the socket, then secure with socket ring.

**NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**

Your installation is now complete. Return power to the junction box and test the fixture.

32100/1

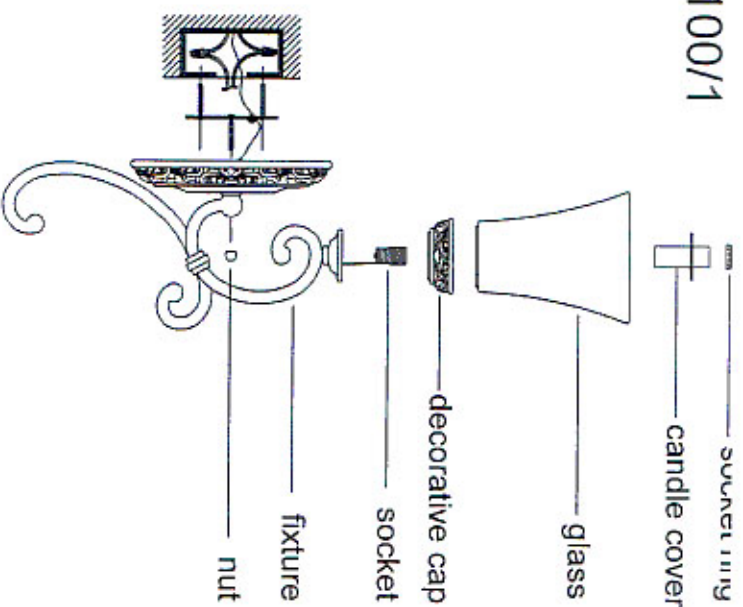

32100/2

