




ASSEMBLY INSTRUCTIONS FOR 39529

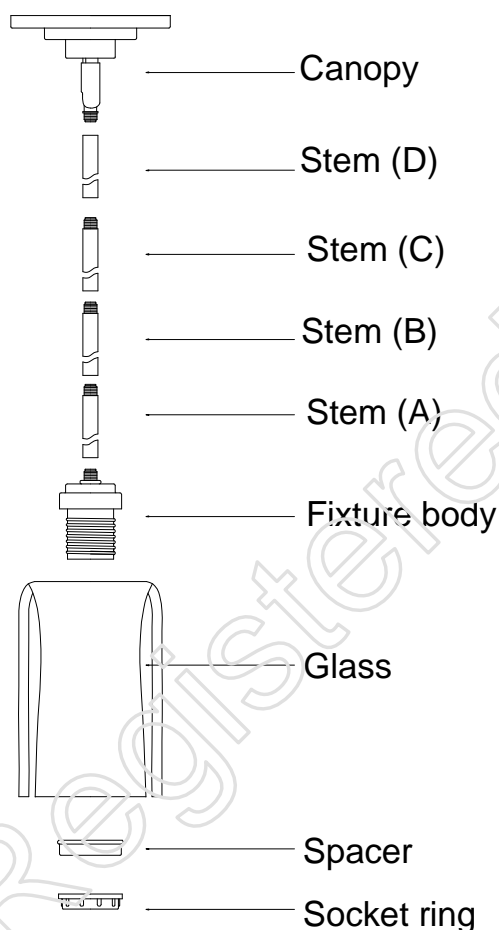

1. Before beginning the assembly, carefully unpack and identify all parts referring to the illustration.
2. Turn the power to the installation point **OFF**.
3. Thread the stem (A) into the protruding nipple at top of the fixture body.
4. Thread the stem (B) into the protruding nipple at top of the stem (A).
5. Thread the stem (C) into the protruding nipple at top of the stem (B).
6. Thread one top of the stem (D) into the protruding nipple at the top of the stem (C), the other top of the stem (D) into the bottom of the canopy.
7. Place the glass, spacer over the socket, secure with the socket ring.
8. Install proper bulb (not provided) to the socket according to the markings and labels on fixture for maximum wattage.
9. Referring to the wiring and installation instructions for the fixture body.
10. Restore power to the installation point **ON**. Retain this sheet for future reference.